

Our monofilament round fillers can be made of PE, PP or LSZH materials in various diameters and color. Our big capacity enables us to provide you with very competitive pricing.


=> monthly capacity 45 000km

---

 [MATERIAL SAFETY DATA SHEET](#)

 [ISO 9001 CERTIFICATE](#)

## Structure of Optical Cable

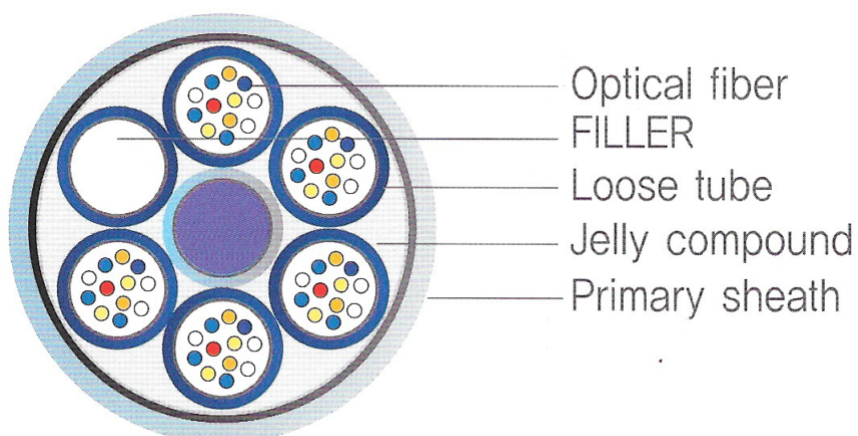

## PE/PP Round Fillers Characteristics

DIAMETER	DIAMETER TOLERANCE	NON-CIRCLE RATIO
2.0mm	2.0±0.05mm	95%
2.2mm	2.2±0.05mm	95%
2.4mm	2.4±0.05mm	95%
3.0mm	3.0±0.05mm	95%

## PE/PP Raw Materials Characteristics

ITEM	UNIT	SPECIFICATION	TEST METHOD
Density	g/cm <sup>3</sup>	0.941~0.960	ASTM D 1505
Tensile Strength	kg/mm <sup>2</sup>	1.94	ASTM D 638
Elongation at Break	%	500	ASTM D 638